
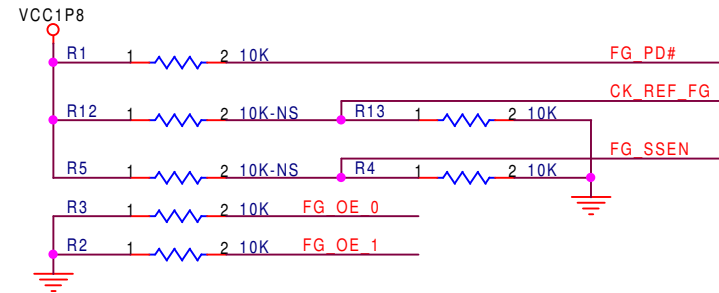
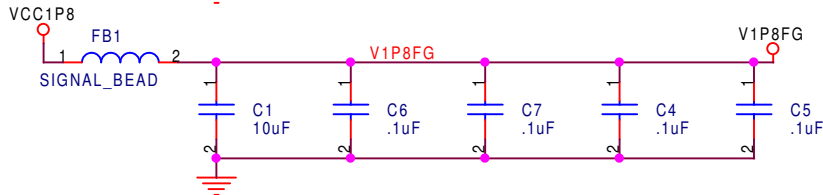
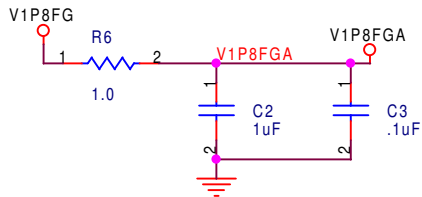


9FGV0231:
 TO CONFIGURE FOR Zdiff = 85 Ohms Rs = 27 ohms.
 9FGV0241:
 No external series resistors.

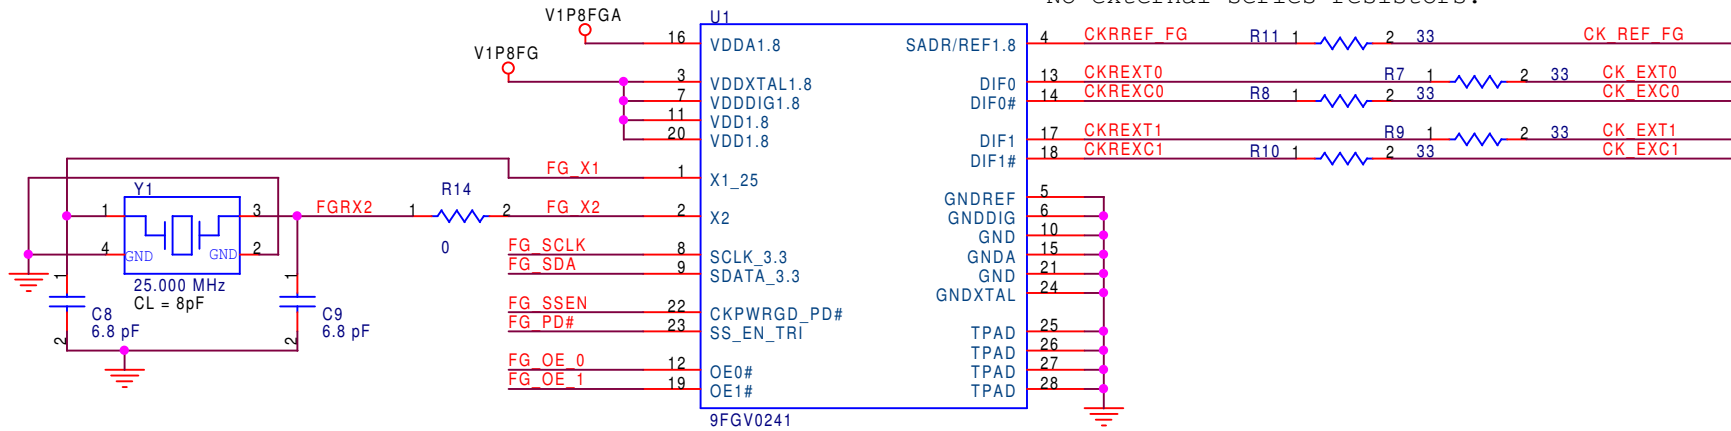

NOTE:FERRITE BEADS FB1 =

Manufacture	Part Number	Z@100MHz	PkgSz	DC res.	Current (Ma)
muRata	BLM21A601R	600	0805	0.30	600
TDK	MMZ2012S601A	600	0805	0.30	600
STEWART	HZ0805E601R	600	0805	0.30	600
AssocCmpTch	CBG0805-600-50	600	0805	0.30	600

Manufacture	Part Number	Z@100MHz	PkgSz	DC res.	Current (Ma)
muRata	BLM18AG601SN1	600	1608	0.50	200
muRata	BLM18BD601SN1_PB	600	1608	0.65	200
Ceratech	HB-1T1608-601	600	1608	0.50	200
TDK	MMZ1608R301A	300	1608	0.20	500

- Layout notes.
1. Separate Xout and Xin traces by 3 x the trace width.
 2. Do not share crystal load capacitor ground via with other components.
 3. Route power from bead through bulk capacitor pad then through 0.1uF capacitor pad then to clock chip Vdd pad.
 4. Do not share ground vias. One ground pin one ground via.

Revision history
 0.1 10/8/2013 first publication

Integrated Device Technology
 San Jose, CA

Size A	Document Number 9FGV0231_SCH 9FGV0231/9FGV0241	Rev 0.1
Date: Tuesday, October 08, 2013	Sheet 1	of 1