

Description

This document details the custom configuration that is programmed into the one-time-programmable (OTP) memory of the 9FGV1006Q505LTGI. Please refer to the device datasheet for further information about the device.

General Configuration

Parameter	Value	Units
Device I ² C Address	Primary 0xD0	—
Crystal Load Capacitance	9.29	pF

Frequency Overview

Parameter	Configuration 0	Configuration 1	Configuration 2	Configuration 3	Units
Internal Crystal	50	50	50	50	MHz
REF 0	Off	Off	Off	Off	MHz
Output 0	100	100	100	100	MHz
Output 1	100	100	100	100	MHz

Configuration 0 Parameters: SEL[1:0] = 00

Parameter	REF 0	Output 0	Output 1	Units
Crystal Frequency	50	50	50	MHz
Default Output Status	Off	On	On	
VDDO Voltage	3.3	3.3	3.3	V
Output Type	LVC MOS	LP-HCSL	LP-HCSL	
Frequency	—	100	100	MHz
Spread Spectrum	—	Off	Off	%
Spread Modulation Rate	—	—	—	kHz
LP-HCSL Impedance	—	100	100	Ω

Configuration 1 Parameters: SEL[1:0] = 01

Parameter	REF 0	Output 0	Output 1	Units
Crystal Frequency	50	50	50	MHz
Default Output Status	Off	On	On	
VDDO Voltage	3.3	3.3	3.3	V
Output Type	LVC MOS	LP-HCSL	LP-HCSL	
Frequency	—	100	100	MHz
Spread Spectrum	—	-0.10	-0.10	%
Spread Modulation Rate	—	31.5	31.5	kHz
LP-HCSL Impedance	—	100	100	Ω

Configuration 2 Parameters: SEL[1:0] = 10

Parameter	REF 0	Output 0	Output 1	Units
Crystal Frequency	50	50	50	MHz
Default Output Status	Off	On	On	
VDDO Voltage	3.3	3.3	3.3	V
Output Type	LVC MOS	LP-HCSL	LP-HCSL	
Frequency	—	100	100	MHz
Spread Spectrum	—	-0.30	-0.30	%
Spread Modulation Rate	—	31.5	31.5	kHz
LP-HCSL Impedance	—	100	100	Ω

Configuration 3 Parameters: SEL[1:0] = 11

Parameter	REF 0	Output 0	Output 1	Units
Crystal Frequency	50	50	50	MHz
Default Output Status	Off	On	On	
VDDO Voltage	3.3	3.3	3.3	V
Output Type	LVC MOS	LP-HCSL	LP-HCSL	
Frequency	—	100	100	MHz
Spread Spectrum	—	-0.50	-0.50	%
Spread Modulation Rate	—	31.5	31.5	kHz
LP-HCSL Impedance	—	100	100	Ω

Typical 12kHz–20MHz Phase Jitter with SSC Off

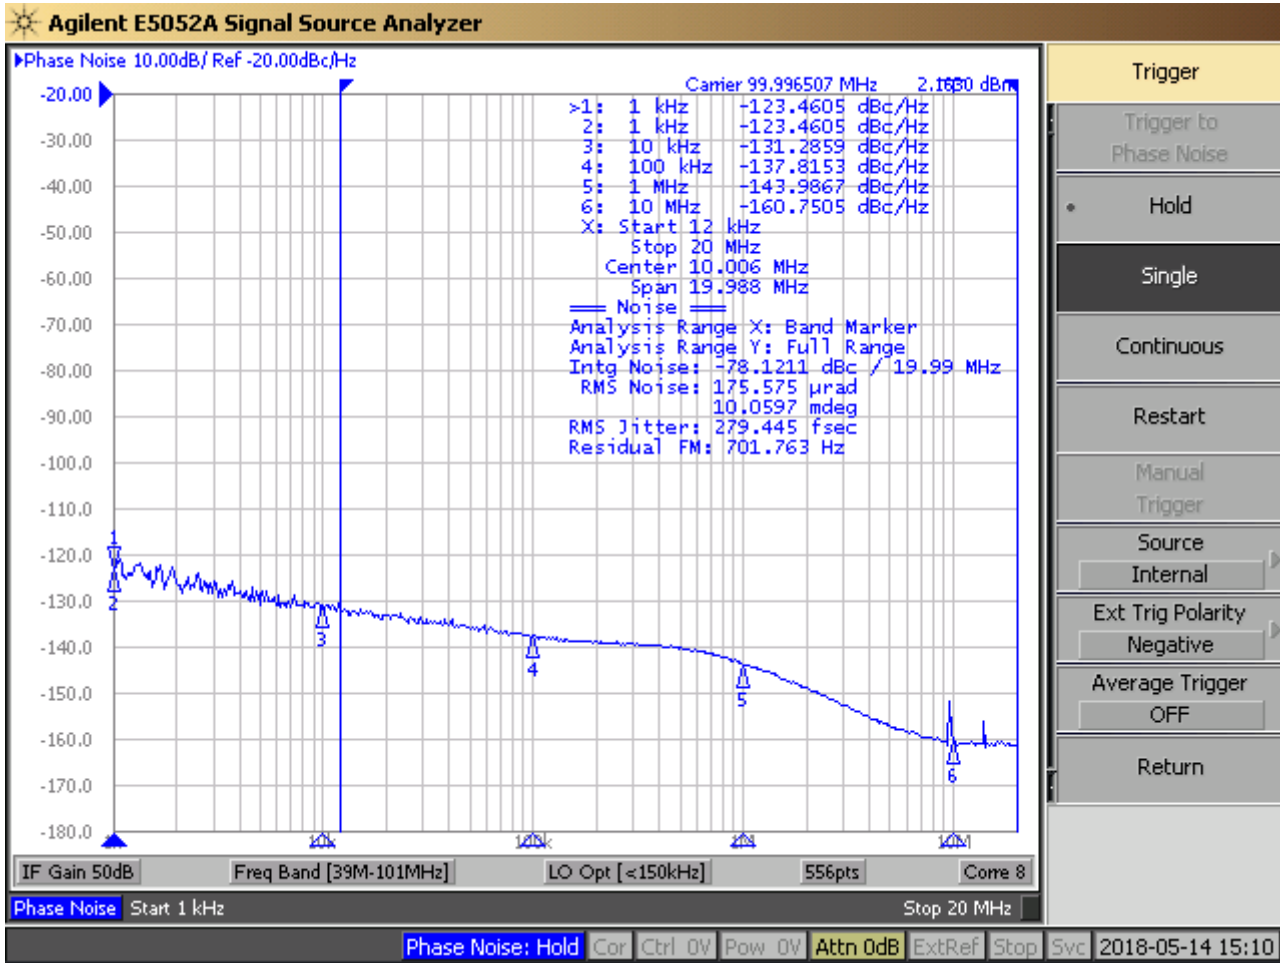


Table 1. Typical PCIe Phase Jitter at -0.5% Spread

PCIe Common Clock Generation	ps
Gen1: pk-pk (ps) Spec = 86 ps	20.71
PCIe Gen2 RMS Low Band (ps) Spec = 3 ps	0.462
PCIe Gen2 RMS High Band (ps) Spec = 3.1 ps	0.949
PCIe Gen3 RMS (ps) Spec = 1 ps	0.285
PCIe Gen4 RMS (ps) Spec = 0.5 ps	0.285

9FGV1006Q505LTGI Ordering Information

Orderable Part Number	Marking	Package	Carrier Type	Temperature
9FGV1006Q505LTGI	6505I YWW xxx	3 × 3 mm, 0.5mm pitch 16-LGA	Tray	-40° to +85°C
9FGV1006Q505LTGI8	6505I YWW xxx	3 × 3 mm, 0.5mm pitch 16-LGA	Reel	-40° to +85°C

Marking notes:

- ¹ Line 1: truncated part number.
- ² “YWW” is the last digit of the year and work week that the part was assembled.
- ³ “xxx” denotes the lot number.

Revision History

Revision Date	Description of Change
May 21, 2018	Initial release.



Corporate Headquarters
6024 Silver Creek Valley Road
San Jose, CA 95138 USA
www.IDT.com

Sales
1-800-345-7015 or 408-284-8200
Fax: 408-284-2775
www.IDT.com/go/sales

Tech Support
www.IDT.com/go/support

DISCLAIMER Integrated Device Technology, Inc. (IDT) and its affiliated companies (herein referred to as “IDT”) reserve the right to modify the products and/or specifications described herein at any time, without notice, at IDT’s sole discretion. Performance specifications and operating parameters of the described products are determined in an independent state and are not guaranteed to perform the same way when installed in customer products. The information contained herein is provided without representation or warranty of any kind, whether express or implied, including, but not limited to, the suitability of IDT’s products for any particular purpose, an implied warranty of merchantability, or non-infringement of the intellectual property rights of others. This document is presented only as a guide and does not convey any license under intellectual property rights of IDT or any third parties.

IDT’s products are not intended for use in applications involving extreme environmental conditions or in life support systems or similar devices where the failure or malfunction of an IDT product can be reasonably expected to significantly affect the health or safety of users. Anyone using an IDT product in such a manner does so at their own risk, absent an express, written agreement by IDT.

Integrated Device Technology, IDT and the IDT logo are trademarks or registered trademarks of IDT and its subsidiaries in the United States and other countries. Other trademarks used herein are the property of IDT or their respective third party owners. For datasheet type definitions and a glossary of common terms, visit www.idt.com/go/glossary. Integrated Device Technology, Inc. All rights reserved.