

Description

The F1129 family is a series of single-ended input / differential output 1400MHz to 6000MHz high gain RF amplifiers. The combination of low noise figure and high linearity performance allows these device to be used in both receiver and transmitter applications.

The F1129 series is designed to operate with a single 5V power supply using a nominal 70mA of I_{CC} . With a supply voltage of 5V, the F1129 variant provides 18dB typical gain with 2.2dB noise figure and +32dBm OIP3 at 3600MHz.

Each F1129 variant is packaged in a 2mm x 2mm, 12-pin DFN, with 50Ω single-ended RF input and 50Ω or 100Ω differential RF output impedances for ease of integration into the signal-path.

Competitive Advantage

- High Gain
- Excellent Gain Flatness Over Frequency
- Outstanding Gain Variance Over Temperature
- STBY Feature
- Differential Output to Directly Drive Transceiver Inputs

Typical Applications


- 5G / MIMO Base Stations
- 4G TDD & FDD Base Stations
- 2G/3G Base Stations
- Repeaters and DAS
- Point to Point Infrastructure
- Public Safety Infrastructure
- Military Handhelds

Features

- RF Range: 1400MHz to 6000MHz
 - F1129Lx Variants: 1400MHz to 3200MHz
 - F1129Mx Variants: 3000MHz to 4200MHz
 - F1129Hx Variants: 4000MHz to 6000MHz
- Gain = 18dB at 3600MHz
- Noise Figure = 2.2dB at 3600MHz
- OIP3 = +32dBm at 3600MHz
- Output P1dB = +18dBm at 3600MHz
- Near-Constant Gain versus Temperature
- 5V Power Supply
- I_{CC} = 70mA at 5V
- 2mA Standby Current
- 350mW Typical DC Power at 5V Supply
- 50Ω Single-ended Input Impedances
- 50Ω or 100Ω Differential Output Impedances
 - F1129xA Variants: 50Ω Differential Outputs
 - F1129xB Variants: 100Ω Differential Outputs
- 1.8V and 3.3V Logic Support for STBY Control
- Operating Temperature (T_{EP}) Range: -40°C to +115°C
- 2mm x 2mm, 12-pin DFN Package

Block Diagram

Figure 1. Block Diagram

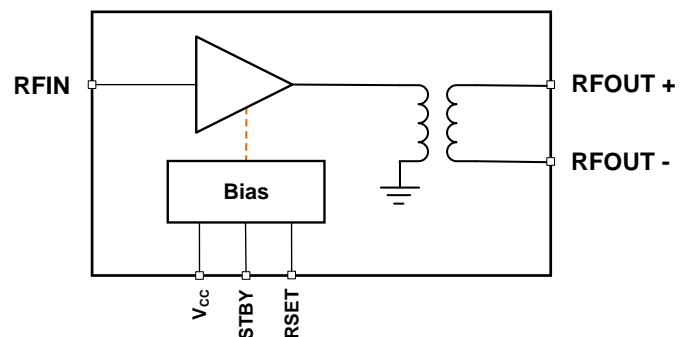

Component Family Variants

Base Part Number	Frequency Band	Frequency Coverage	Differential Output Impedance
F1129LA	Low	1400MHz to 3200MHz	50Ω
F1129LB			100Ω
F1129MA	Mid	3000MHz to 4200MHz	50Ω
F1129MB			100Ω
F1129LA	High	4000MHz to 6000MHz	50Ω
F1129LB			100Ω

Ordering Information

Orderable Part Number	Package	MSL Rating	Shipping Packaging	Temperature
F1129LANELI	2mm x 2mm x 0.75mm 12 pin DFN	1	Tray	-40° to +115°C
F1129LANELI8	2mm x 2mm x 0.75mm 12 pin DFN	1	Reel	-40° to +115°C
F1129LBNELI	2mm x 2mm x 0.75mm 12 pin DFN	1	Tray	-40° to +115°C
F1129LBNELI8	2mm x 2mm x 0.75mm 12 pin DFN	1	Reel	-40° to +115°C
F1129MANELI	2mm x 2mm x 0.75mm 12 pin DFN	1	Tray	-40° to +115°C
F1129MANELI8	2mm x 2mm x 0.75mm 12 pin DFN	1	Reel	-40° to +115°C
F1129MBNELI	2mm x 2mm x 0.75mm 12 pin DFN	1	Tray	-40° to +115°C
F1129MBNELI8	2mm x 2mm x 0.75mm 12 pin DFN	1	Reel	-40° to +115°C
F1129HANELI	2mm x 2mm x 0.75mm 12 pin DFN	1	Tray	-40° to +115°C
F1129HANELI8	2mm x 2mm x 0.75mm 12 pin DFN	1	Reel	-40° to +115°C
F1129HBNELI	2mm x 2mm x 0.75mm 12 pin DFN	1	Tray	-40° to +115°C
F1129HBNELI8	2mm x 2mm x 0.75mm 12 pin DFN	1	Reel	-40° to +115°C
F1129EVB	Evaluation Board			



Corporate Headquarters

6024 Silver Creek Valley Road
San Jose, CA 95138
www.IDT.com

Sales

1-800-345-7015 or 408-284-8200
Fax: 408-284-2775
www.IDT.com/go/sales

Tech Support

www.IDT.com/go/support

DISCLAIMER Integrated Device Technology, Inc. (IDT) and its affiliated companies (herein referred to as "IDT") reserve the right to modify the products and/or specifications described herein at any time, without notice, at IDT's sole discretion. Performance specifications and operating parameters of the described products are determined in an independent state and are not guaranteed to perform the same way when installed in customer products. The information contained herein is provided without representation or warranty of any kind, whether express or implied, including, but not limited to, the suitability of IDT's products for any particular purpose, an implied warranty of merchantability, or non-infringement of the intellectual property rights of others. This document is presented only as a guide and does not convey any license under intellectual property rights of IDT or any third parties.

IDT's products are not intended for use in applications involving extreme environmental conditions or in life support systems or similar devices where the failure or malfunction of an IDT product can be reasonably expected to significantly affect the health or safety of users. Anyone using an IDT product in such a manner does so at their own risk, absent an express, written agreement by IDT.

Integrated Device Technology, IDT and the IDT logo are trademarks or registered trademarks of IDT and its subsidiaries in the United States and other countries. Other trademarks used herein are the property of IDT or their respective third party owners. For datasheet type definitions and a glossary of common terms, visit www.idt.com/go/glossary. All contents of this document are copyright of Integrated Device Technology, Inc. All rights reserved.