

Description

The HXC44400 is a uni-directional Quad Channel PAM-4 CDR/Retimer. The chip can support both data rates of 56Gbps PAM4 and 28Gbps NRZ. The HXC44400 can be used in 200G QSFP56 and 400G QSFP-DD modules. The chip is optimized for Ethernet applications. It is in full compliance with OIF CEI-56G-VSR and CEI-56G-MR. The power consumption is typically 330mW per channel.

The HXC44400 has built-in programmable and adaptive equalization in both the receiver and transmitter paths to compensate for transmission line losses and inter-symbol interference.

Auto DC-offset calibration is implemented with auto phase calibration and the unique CDR/Retimer architecture enables independent receive and transmit CDR loop bandwidth optimization for increased Jitter Tolerance and reduced Jitter Transfer performance.

The device has a built-in, single 14GHz master VCO providing the oscillator output for each channel. In addition, the self-test functions such as a PRBS generator/checker, Jitter Tolerance, and Eye Open Monitor provide users with module-level diagnostics and function tests.

The HXC44400 also integrates an MCU for a programmable control, which could reduce BOM cost and enable better module design. The I2C interface is used to control the built-in MCU.


Typical Applications

- 200G QSFP56 Ethernet Transceivers
- 400G QSFP-DD Ethernet Transceivers
- Active optical Cables

Features

- Quad CDR/Retimer for transmitter or receiver
- Supports 56Gbps PAM4 and 28Gbps NRZ
- Output swing up to minimum 800mVpp with 7-bit resolution for output amplitude control
- Adaptive CTLE up to 10dB and DFE with 10 taps in receiver equalization
- Programmable 3-tap de-emphasis for a transmit
- Linearity compensation for output through a look-up table
- Independent, adaptive bandwidth control in RX CDR for optimum jitter tolerance
- Internal and automatic DC and phase offset calibrations
- Reference-less and Master channel-less operation
- On-chip testability: EOM, JTOL, PRBS generator/checker, user-defined pattern generator
- Embedded CPU with RAM/ROM and downloadable firmware
- I2C control interface (16-bit address and data)

Block Diagram

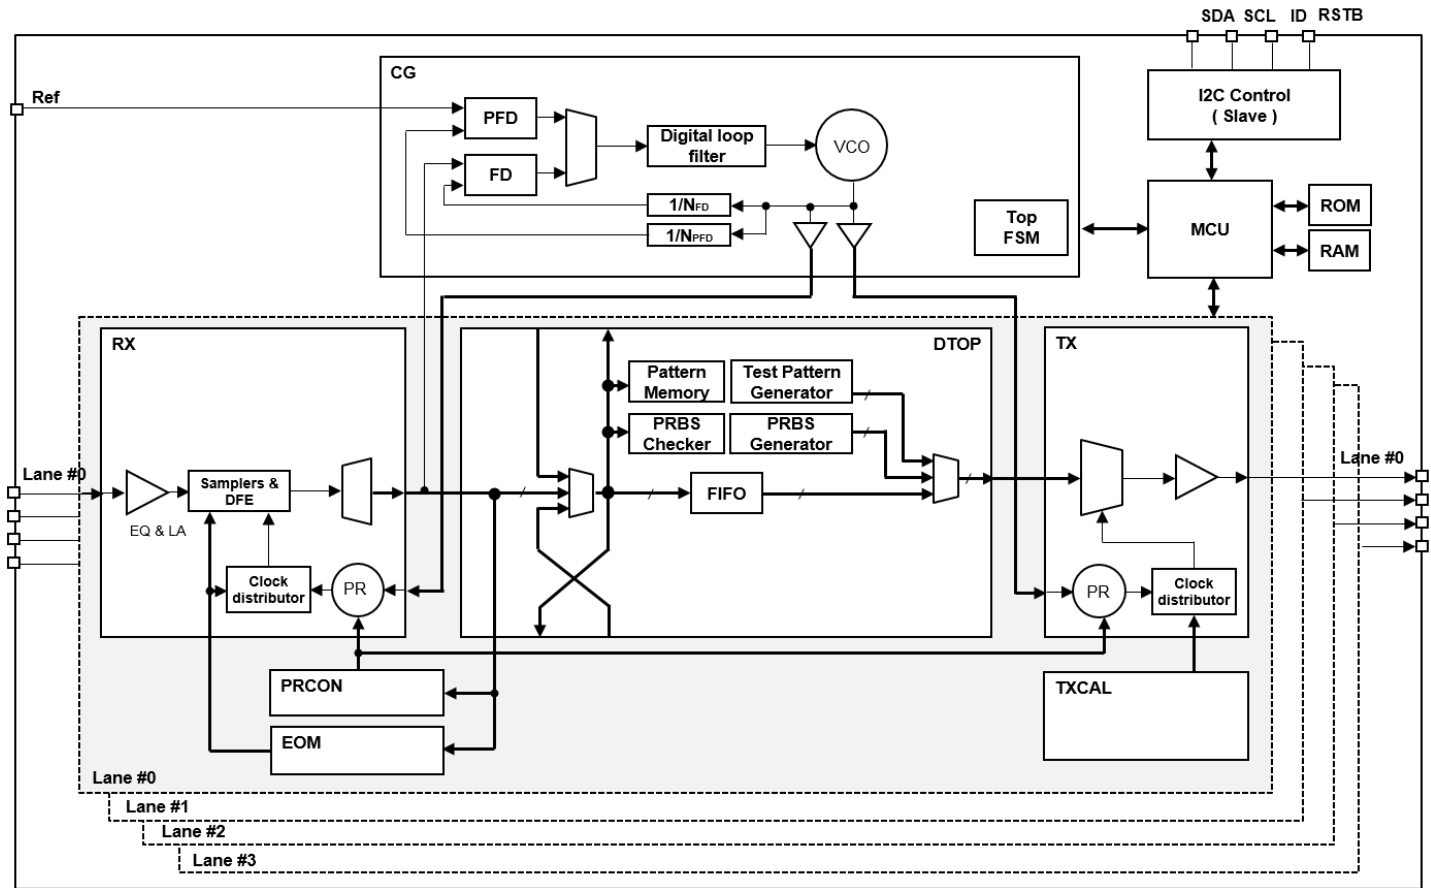

Corporate Headquarters

6024 Silver Creek Valley Road
San Jose, CA 95138
www.IDT.com

Sales

1-800-345-7015 or 408-284-8200
Fax: 408-284-2775
www.IDT.com/go/sales

Tech Support

www.IDT.com/go/support

DISCLAIMER Integrated Device Technology, Inc. (IDT) and its affiliated companies (herein referred to as "IDT") reserve the right to modify the products and/or specifications described herein at any time, without notice, at IDT's sole discretion. Performance specifications and operating parameters of the described products are determined in an independent state and are not guaranteed to perform the same way when installed in customer products. The information contained herein is provided without representation or warranty of any kind, whether express or implied, including, but not limited to, the suitability of IDT's products for any particular purpose, an implied warranty of merchantability, or non-infringement of the intellectual property rights of others. This document is presented only as a guide and does not convey any license under intellectual property rights of IDT or any third parties.

IDT's products are not intended for use in applications involving extreme environmental conditions or in life support systems or similar devices where the failure or malfunction of an IDT product can be reasonably expected to significantly affect the health or safety of users. Anyone using an IDT product in such a manner does so at their own risk, absent an express, written agreement by IDT.

Integrated Device Technology, IDT and the IDT logo are trademarks or registered trademarks of IDT and its subsidiaries in the United States and other countries. Other trademarks used herein are the property of IDT or their respective third party owners. For datasheet type definitions and a glossary of common terms, visit www.idt.com/go/glossary. All contents of this document are copyright of Integrated Device Technology, Inc. All rights reserved.